

## Energy Efficient Fireplace (Water)

Manufactured according to the European standards **EN 13229**

The energy fireplace **Kombi ka** is an original and innovative in design and operation fireplace of central heating, which achieves (very high) efficiency compared to any conventional fireplace.

It's actually a wood boiler that can be attached to any type of radiator circuit and can be used either independently as a primary heat source, or parallel to the central heating boiler providing significant savings in fuel.

The hearth of the fireplace is surrounded entirely by double steel walls that contain water, and does not require any fire-resistant insulation.


It has built-in panel with controls such as remote thermometer and thermostat for proper and efficient operation.

It can be externally decorated with any material (marble, stone, plasterboard, etc.) and can fit perfectly with the furniture and architecture of every house.

It can be connected easily by a technician, similarly to a central heating boiler.

The fireplace-boiler **Kombi ka** excels because it provides:

- Excellent performance and economy
- Totally safe operation
- Easy maintenance and cleaning.
- Economic and healthy heating.

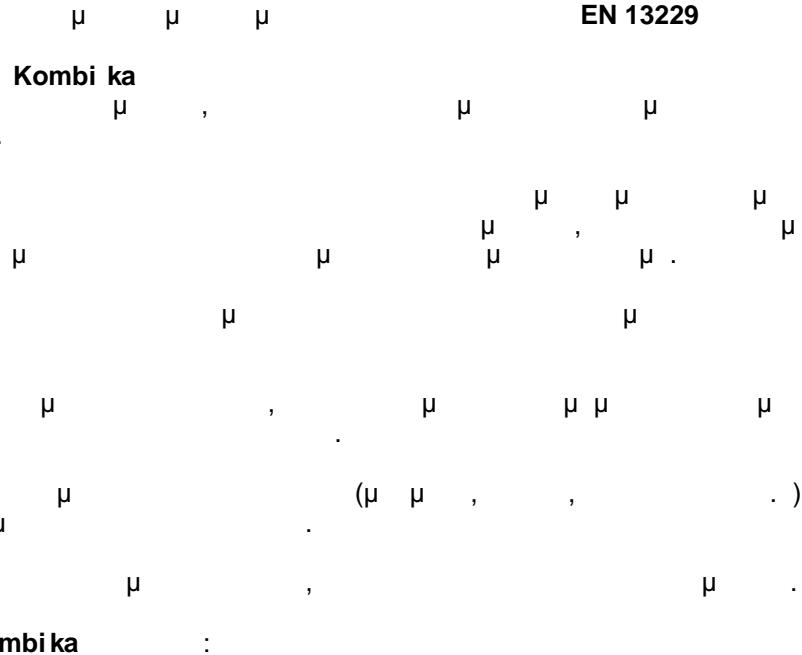

**Kombi ka**

- 
- 
- 
-

## Fireplace Energy efficient (Water)

( )



### Technical Characteristics

| TYPE /                              | ka  | 15     | 20     | 25     | 30     | 35     |
|-------------------------------------|-----|--------|--------|--------|--------|--------|
| Output /                            | Kw  | 14     | 23,2   | 29     | 34,8   | 40,6   |
| Max operating temperature<br>μ      | °C  | 90     | 90     | 90     | 90     | 90     |
| Max operating pressure              | Bar | 2,5    | 2,5    | 2,5    | 2,5    | 2,5    |
| Weight + retractable door<br>+ μ    | Kgr | 165+35 | 192+40 | 236+44 | 286+60 | 318+65 |
| Height /                            | mm  | 1.100  | 1.200  | 1.200  | 1.400  | 1.400  |
| Height with retractable door<br>μ μ | mm  | 1.500  | 1.600  | 1.600  | 1.800  | 1.800  |
| Front width (external)<br>( )       | mm  | 700    | 800    | 900    | 1.000  | 1.100  |
| Back width (external)<br>( )        | mm  | 500    | 600    | 700    | 800    | 900    |
| Length (external) / ( )             | mm  | 550    | 600    | 650    | 700    | 750    |
| Hearth depth (internal)<br>( )      | mm  | 500    | 550    | 600    | 650    | 700    |
| Inlet / Outlet connections          | in  | 1      | 1      | 1 ¼    | 1 ½    | 1 ½    |
| Chimney / μ                         | Ø   | 150    | 200    | 250    | 300    | 300    |

μ

The company reserves the right of changing the characteristics without prior notice.

