

Angular Energy Efficient Fireplace (Water)

Manufactured according to the European standards **EN 13229**

The energy fireplace **Kombi ka** is an original and innovative in design and operation fireplace of central heating, which achieves (very high) efficiency compared to any conventional fireplace.

It's actually a wood boiler that can be attached to any type of radiator circuit and can be used either independently as a primary heat source, or parallel to the central heating boiler providing significant savings in fuel.

The hearth of the fireplace is surrounded entirely by double steel walls that contain water, and does not require any fire-resistant insulation.

It has built-in panel with controls such as remote thermometer and thermostat for proper and efficient operation.


It can be externally decorated with any material (marble, stone, plasterboard, etc.) and can fit perfectly with the furniture and architecture of every house.

It can be connected easily by a technician, similarly to a central heating boiler.

The fireplace-boiler **Kombi ka** excels because it provides:

- Excellent performance and economy
- Totally safe operation
- Easy maintenance and cleaning.
- Economic and healthy heating.

It can be manufactured with a right or left opening.

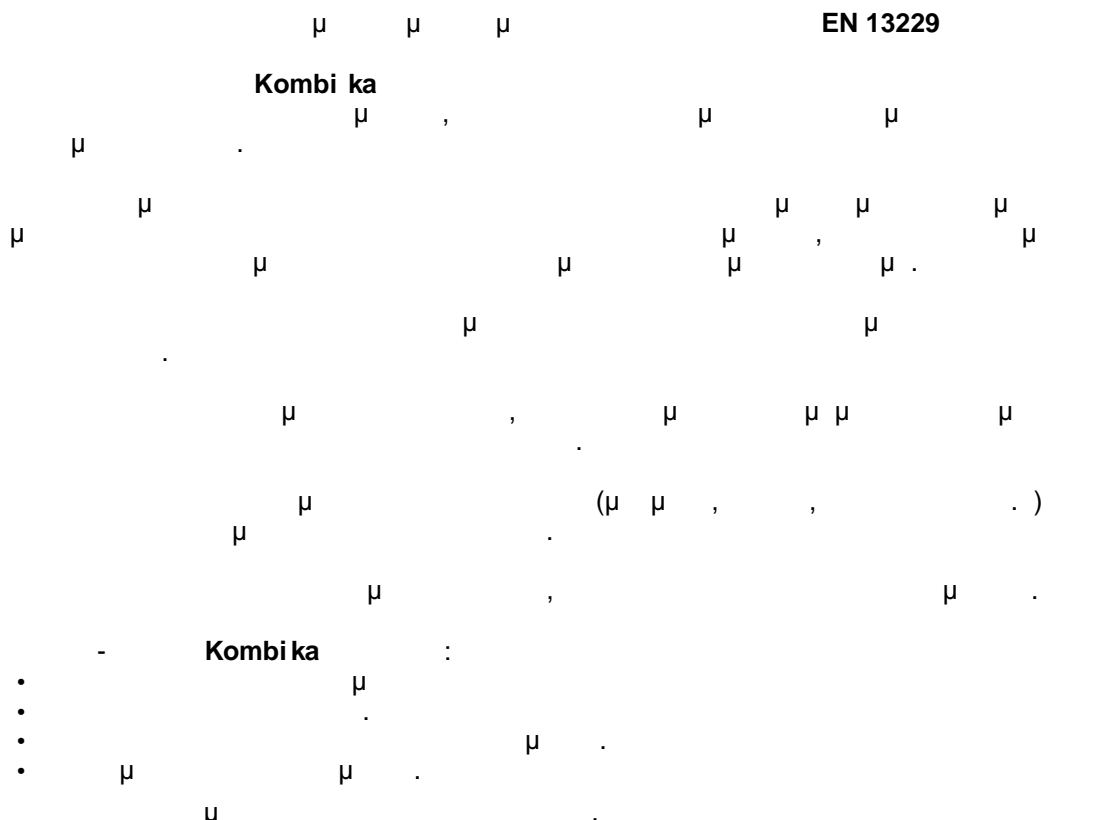

**Angular Fireplace
Energy Efficient (Water)**

()



Technical Characteristics

TYPE /	tn-ad	15	20	25
Output /	KW	14	18	22
Max operating temperature μ	°C	90	90	90
Max operating pressure	bar	2,5	2,5	2,5
Height /	mm	1.100	1.200	1.200
Height with retractable door μ μ	mm	1.500	1.600	1.600
Front width (external) μ ()	mm	600	700	800
Back width (external) ()	mm	500	600	700
Length (external + door 80) (+ 80)	mm	550	600	650
Hearth depth (internal) ()	mm	500	550	600
Chimney / μ	Ø	150	200	250

μ

The company reserves the right of changing the characteristics without prior notice.

